


Dual Mode Mobile Antenna for the 136-174 MHz Band and GPS 1575 MHz



High-performance radiator (conical 17-7 PH Black Chrome whip), which can be easily tuned by use of cutting chart. The antenna has vertical polarization in 1/4 wave configuration.

The antenna is supplied with 5.0 meter cable of the RG58/U type for RF and 5 meter RG 174 cable for GPS, which can terminate in any type of connector.

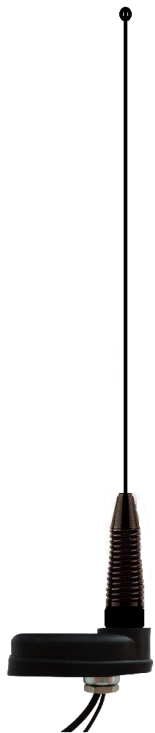

MOUNT MGS  
WITH SPRING S4



GPS-2M



IN-2R



## SPECIFICATIONS


### ELECTRICAL

Frequency Range	136-174MHz ,1575 Mhz GPS
Input power	100 W
SWR	< 1.5 : 1
Impedance	50 Ω
Polarization	Vertical
Gain	0 dB , 27 dB GPS

### MECHANICAL

Length	70 cm max.
Weight	0.4 Kg

**When ordering, please, specify :** Exact Tx Rx frequencies. Connector type ( BNC, PL, TNC, N, FME, SMA). Connector GPS ( SMA, FME, SMB....). With or W/O Spring (S4).

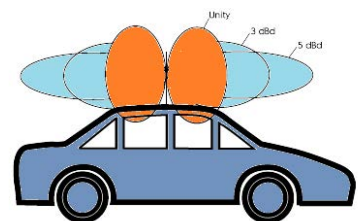

Omnidirectional Antennas  
1/4 Lambda, 0 dB Gain