

Dual Mode Mobile Antenna for the 66-88 MHz Band and GPS 1575 MHz

High-performance radiator (conical 17-7 PH Black Chrome whip), which can be easily tuned by use of cutting chart.

The antenna has vertical polarization in 1/4 wave configuration. The antenna is supplied with 5.0 meter cable of the RG58/U type for RF and 5 meter RG 174 cable for GPS, which can terminate in any type of connector.



MOUNT MGS WITH SPRING S4



BLACK SPRING S4




IN-4R



SPECIFICATIONS

ELECTRICAL	
Frequency Range	66-88 MHz , 1575 Mhz GPS
Input power	100 W
SWR	< 1.5 : 1
Impedance	50 Ω
Polarization	Vertical
Gain	0 dB , 27 dB gain GPS
MECHANICAL	
Length	155 cm max.
Weight	0.4 Kg

When ordering, please, specify : Exact Tx Rx frequencies. Connector type (BNC, PL.TNC,N,FME,SMA). Connector GPS (SMA, FME,SMB....). With or W/O Spring (S4).

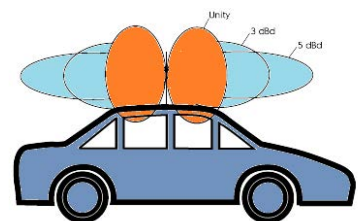

Omnidirectional Antennas
1/4 Lambda, 0 dB Gain